
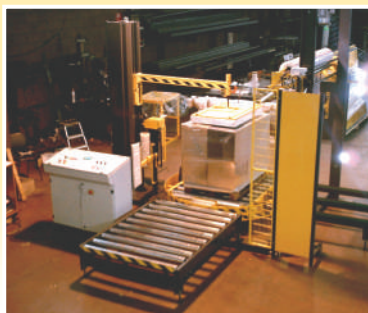


**ECOSPIR
LINE**

Fully-automatic pallet-wrapping lines


ECOSPIR LINE

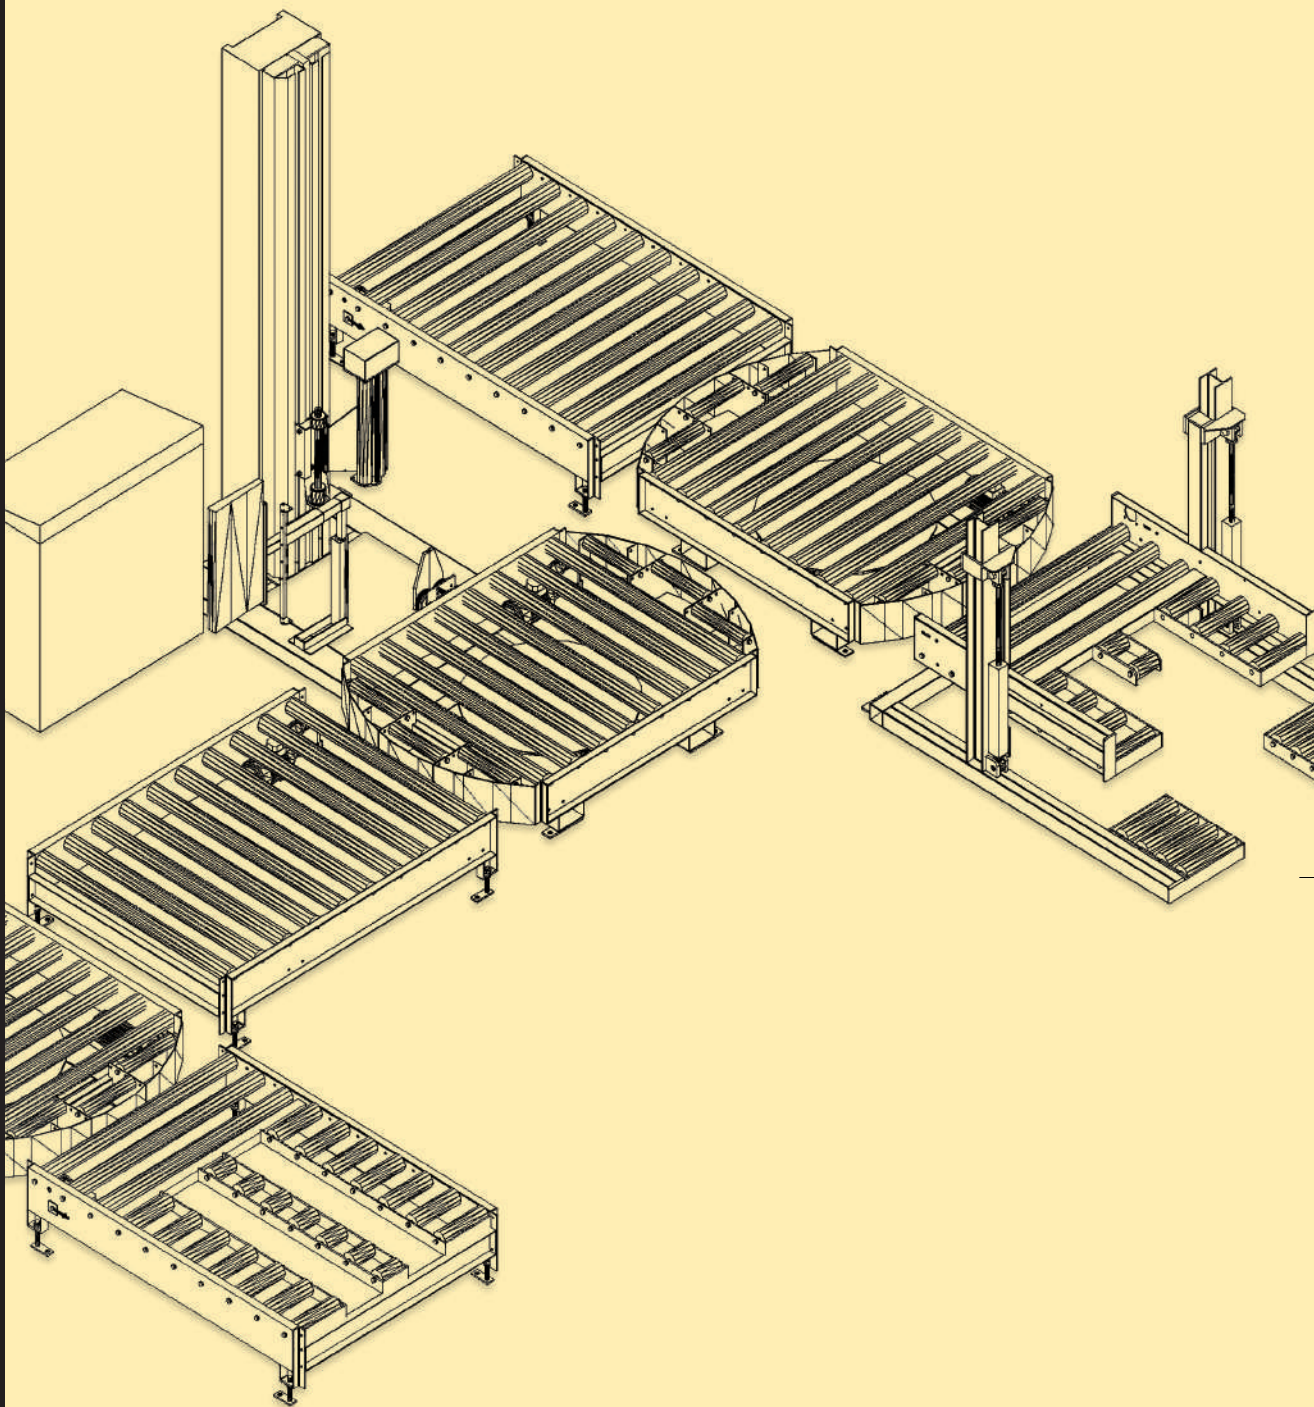

**ECOSPIR
LINE**

ECOSPIR LINE

LAYOUT OF A STANDARDIZED PALLET-WRAPPING LINE

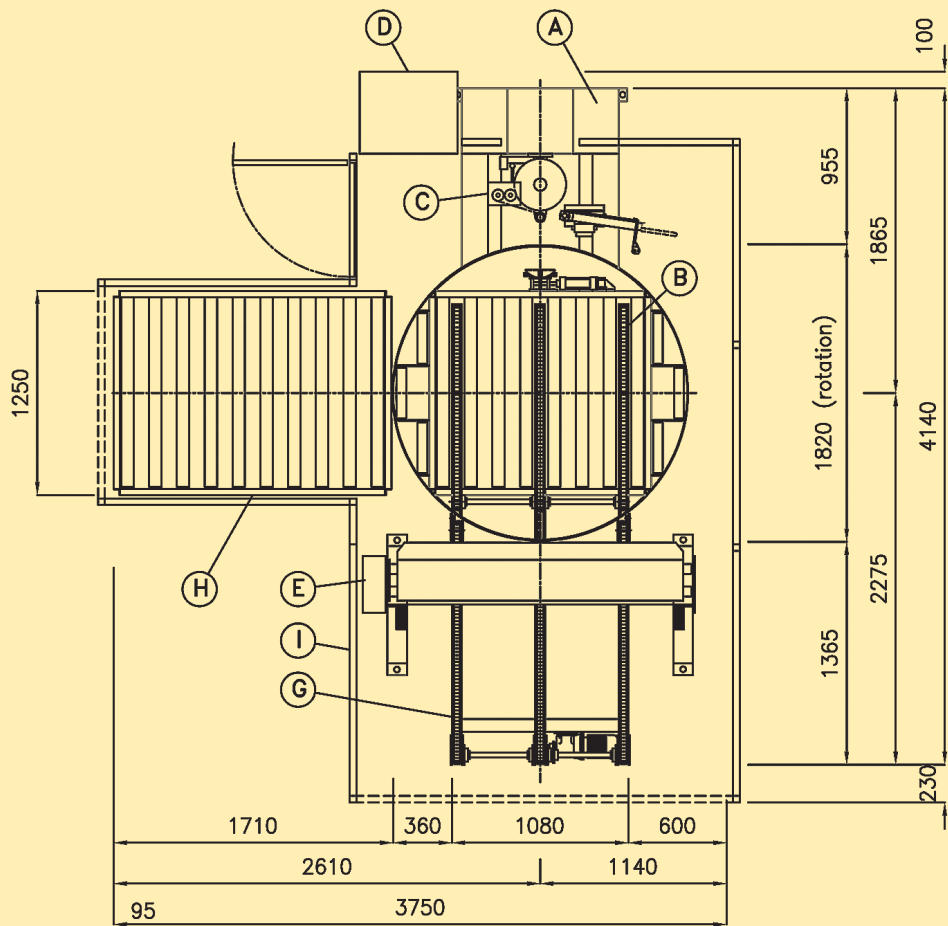

- A) Automatic pallet-wrapping equipped with top-pressing unit.
- B) Device integrated in the turntable and synchronized to transfer a pallet from a chain to a roller conveyor.
- C) Power pre-stretch system granting a film economy up to 70%.
- D) Main control box.
- E) Automatic top covering machine (on request antistatic unit to reduce electrostatic charges).
- G) Motorized chain conveyor system for pallet transfer.
- H) Motorized roller conveyor system for pallet transfer.
- I) Grilled fence for safety and protection.

You can choose your automatic pallet wrapping line among several standard or customized solutions, available on request, realized and sold all over the world.

Machine manufactured according to **CE** rules

TECHNICAL SPECIFICATIONS

Power supply	220/380 V - 3 Ph + N
Maximum pallet dimensions	800x1200 mm / 1000x1200 mm
MMaximum pallet height	1800 mm
Maximum pallet weight	1200 kgs
Motorised chain conveyor speed	10 m/min.
Motorised roller conveyor speed	10 m/min.
Output	20/50 paletts/hour

Technical data subject to variations without prior notice.

ITALDIBIPACK GROUP

Via Europa 35 - 20010 Pogliano Milanese (MI) Italy
Tel. +39 02 9396461 - Fax +39 02 93549494
www.italdibipack.com • e-mail: info@italdibipack.com