

# SYSTEM HERCULES

(WORLD PATENT)


THE LATEST INCREDIBLY INNOVATIVE IDEA  
**TWO SYSTEMS,  
TWO MACHINES FOR THE PRICE OF ONE**



LIFTER

STRETCH WRAPPER

KIT "TRANSFORMER"®

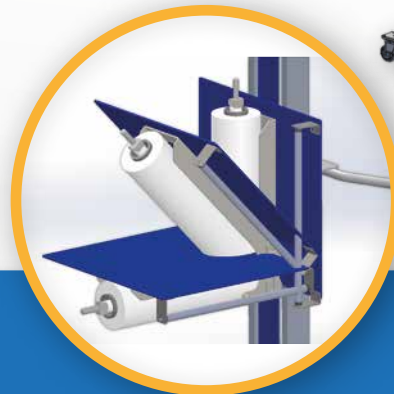

**TO SAVE TIME, MONEY, EFFORTS  
AND SAFEGUARD THE HEALTH**

Thanks to the "TRANSFORMER"® device, Hercules, the lifter and assistant for the stacking of the pallet, can be **immediately** converted into a **stretch-film wrapper**, without parts to be mounted or removed.



**Fortunately Hercules has arrived...**

**IT CAN NOT CONTINUE LIKE THIS... THE LAWS FORBIDS IT**

In terms of health and safety at work, the manual lifting of heavy items and the manual stretch-film wrapping involve serious health risks.

**CAUSE**

- repeated bending and twisting of the torso
- violent shocks to hands, shoulders and fingers
- repeated gyrations while moving backward, with a stretch-film roll hold in the hands, requiring it to be tightened and pulled

**EFFECTS**

- pain or injuries in back, shoulders, knees and other parts of the body
- abrasions, wounds to the hands and fingers
- lightheadedness and dizziness with risks for the equilibrium and the physical fitness


**WITH HERCULES, PUT A STOP TO PROBLEMS AND TO PAINS**

Save fatigue to the operator, giving him back confidence and enthusiasm. Hercules increases the productivity and the profitability of the labour, improving the result: it helps and it allows the stretch-film wrapping of higher loads and, in the lifter version, it gives a great help in the preparation of the load.

**HERCULES LIFTING**



**HERCULES WRAPPING**

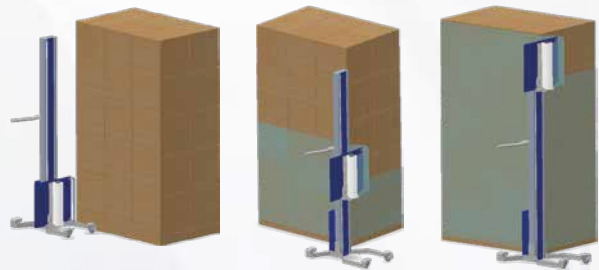

| technical characteristics in LIFTING MODE  | technical characteristics in STRETCH-WRAPPER MODE   |
|--|---|
| Dimension of the lifting plate: 500 x 450 mm   | Pre-stretched film with 9-10-12-15 µm thickness<br>External film roll diameter 120 mm<br>Stretch-film roll height 440/450 with a max core-holder height of 460 mm<br>Internal core Ø: 55 mm |
| Lifting plate in aluminium   | Maximum pallet height: 2000 mm  |
| Maximum lifting height: 1500 mm  | Adjustable film carriage speed  |
| Maximum lifting weight: up to 70 kg, with decreasing steps (refer to the related list) | Regulation of the stretch-film tension through mechanic brake<br>Quick release system with the set brake level  |



**ITALDIBIPACK**

contact us:  
tel. ++39 02 9396461  
fax: ++39 02 93549494

Italdibipack S.p.A. - Via Europa, 35  
20010 Pogliano Milanese - Milano (Italy)

visit our website:  
[www.italdibipack.com](http://www.italdibipack.com)  
info@italdibipack.com